

Continuous

hot air drying



BT

## Belt Driers BT



**SPALECK**  
Oberflächentechnik

30

60


90

120

150

180


## Transit Belt Driers BT 140, BT 240

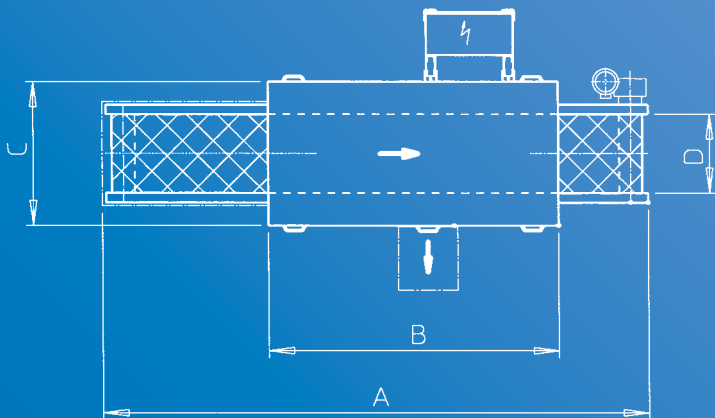

- ▲ Drying of the parts by hot air only, without granulate
- ▲ Dust-free drying, the drying granulate does not lodge inside the parts
- ▲ Especially designed for the drying of sensitive parts that must not touch
- ▲ The parts travel on a link conveyor passing a drying chamber
- ▲ The air temperature can be adjusted via thermostat, the heat is supplied by an electric hot-air fan
- ▲ The conveyor speed is infinitely adjustable

Technical data:	BT 140	BT 240
Electrical connexions	400/230 V, 50 Hz	400/230 V, 50 Hz
Heating capacity in kW	20	25
Hot air fan in kW	1,8	2,3
Max. air temperature in °C	130	140
Conveyor speed m/min.	0,4-2,5	0,4-2,5
Space requirements in m <sup>2</sup>	2,3	3,6
Dimensions in mm:	BT 140	BT 240
A	2265	3765
B	1000	2000
C	725	1000
D	675	550
E	500	500
F	820	820
G	1825	1825

Subject to technical modifications

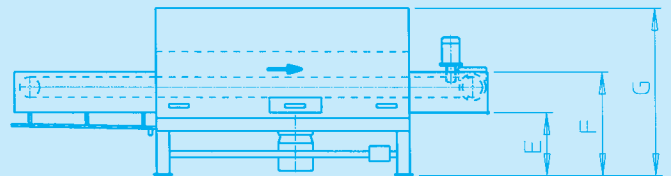

# BT



**SPALECK**  
Oberflächentechnik

SPALECK Oberflächentechnik GmbH + Co. KG  
Postfach 2253 · D-46372 Bocholt  
Schlavenhorst 117 · D-46395 Bocholt  
Telefon +49 (0) 28 71 / 95 00-0  
Telefax +49 (0) 28 71 / 95 00-95  
www.spaleck.biz · info@spaleck.biz