



Edge breaking

Cleaning

Ball burnishing

SAV

Tub Vibrator SAV



SPALECK
Oberflächentechnik

30

60


90

120

150

180

Tube Vibrator SAV 125

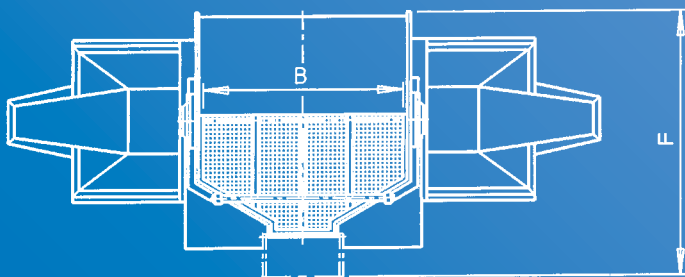

Tub in discharge position


The unique Spaleck technology for better production

- ▲ Special drive system for best treatment intensity – economic and with little wear and tear
- ▲ Integrated separation with automatic media return
- ▲ Mirror polish of the best possible quality thanks to the motor speed of 3000 rpm
- ▲ Special, highly wear-resistant rubber lining
- ▲ Solid and functional machine design
- ▲ Paint green (RAL 6011) or as per request
- ▲ Sound insulation optional

Technical data:	SAV 125
Tub volume (l)	125
Operating voltage	400/230 V/50 Hz
Motor output (kW)	4,4
Motor speed (rpm)	3000
Net weight	1100
Max. weight (kg)	1675
Space requirement (basic machine) (m ²)	3

Dimensions in mm:	SAV 125
A	295
B	950
C	1395
D	2150
E	2750
F	1250
G	745
H	940
J	75
K	1040
L	1660
M	1370

Subject to technical modifications

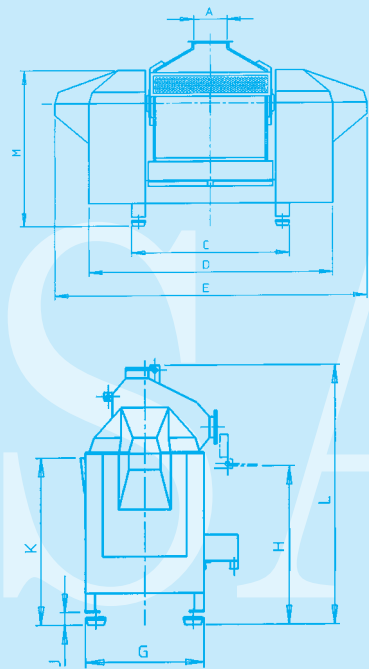

SPALECK Oberflächentechnik GmbH + Co. KG
 Postfach 2253 · D-46372 Bocholt
 Schlavenhorst 117 · D-46395 Bocholt
 Telefon +49 (0) 28 71 / 95 00-0
 Telefax +49 (0) 28 71 / 95 00-95
 www.spaleck.biz · info@spaleck.biz