

Application example

coin blank

production



VAT-S

Hot Air Driers VAT-S



SPALECK
Oberflächentechnik

30

60

90

120



150

180

Hot Air Driers VAT 540S, VAT 140S

The unique Spaleck technology for better production

- ▲ The drying is effected by hot air only, no drying granulate is required
- ▲ Drying without dust residues
- ▲ The parts travel 2,5 (VAT 540-S) and 3,5 (VAT 140-S) complete turns on a screen deck
- ▲ Transport speed infinitely variable with a frequency converter (optional)
- ▲ 100% unloading, batch-to-batch security
- Optional for VAT540S:
 - ▲ Pneumatically operated separation flap
 - ▲ Reduction of the travel length by opening the flap

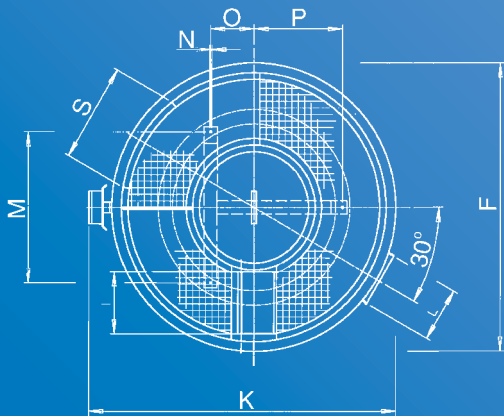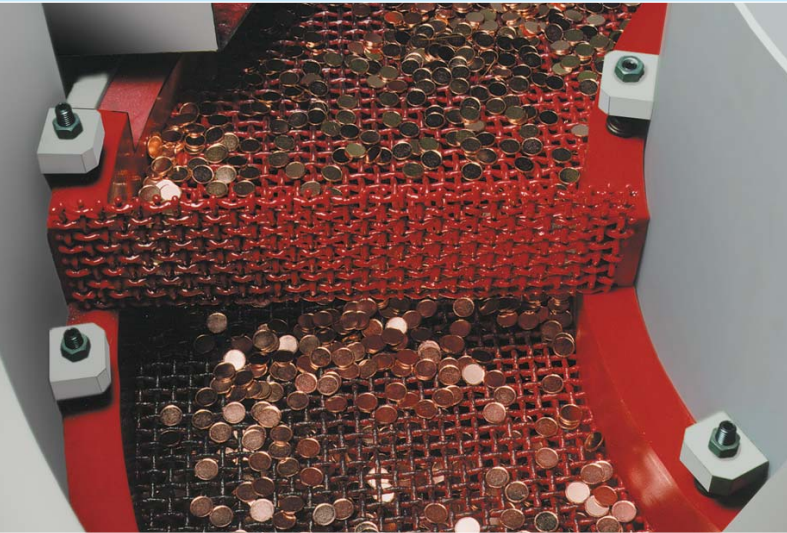

Technical Data:
Tub volume (l)
Screen length (mm)
Motor output (kW)
Heater output (kW)
Connected load
Motor speed (rpm)
Net weight (kg) without electr. switch box


VAT 540S
540
9300
3,5
3x5/3x10
400 V/50Hz
1460
1350

VAT 140S
140
9400
1,3
3x5
400 V/50Hz
1450
1200

Dimensions in mm:
A
B
D
F
G
H
I
J
K
L
M
N
O
P
R
S

VAT 540S
940
885
135
1760
205
275
380
439
1900
350
920
14
270
550
620
600

VAT 140S
860
810
130
1250
160
290
-
1400
1400
250
1200
14
-
-
610
370

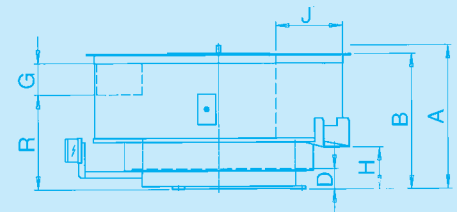

Subject to technical modifications



SPALECK Oberflächentechnik GmbH + Co. KG
 Postfach 2253 · D-46372 Bocholt
 Schlavenhorst 117 · D-46395 Bocholt
 Telefon +49 (0) 28 71 / 95 00-0
 Telefax +49 (0) 28 71 / 95 00-95
 www.spaleck.biz · info@spaleck.biz